




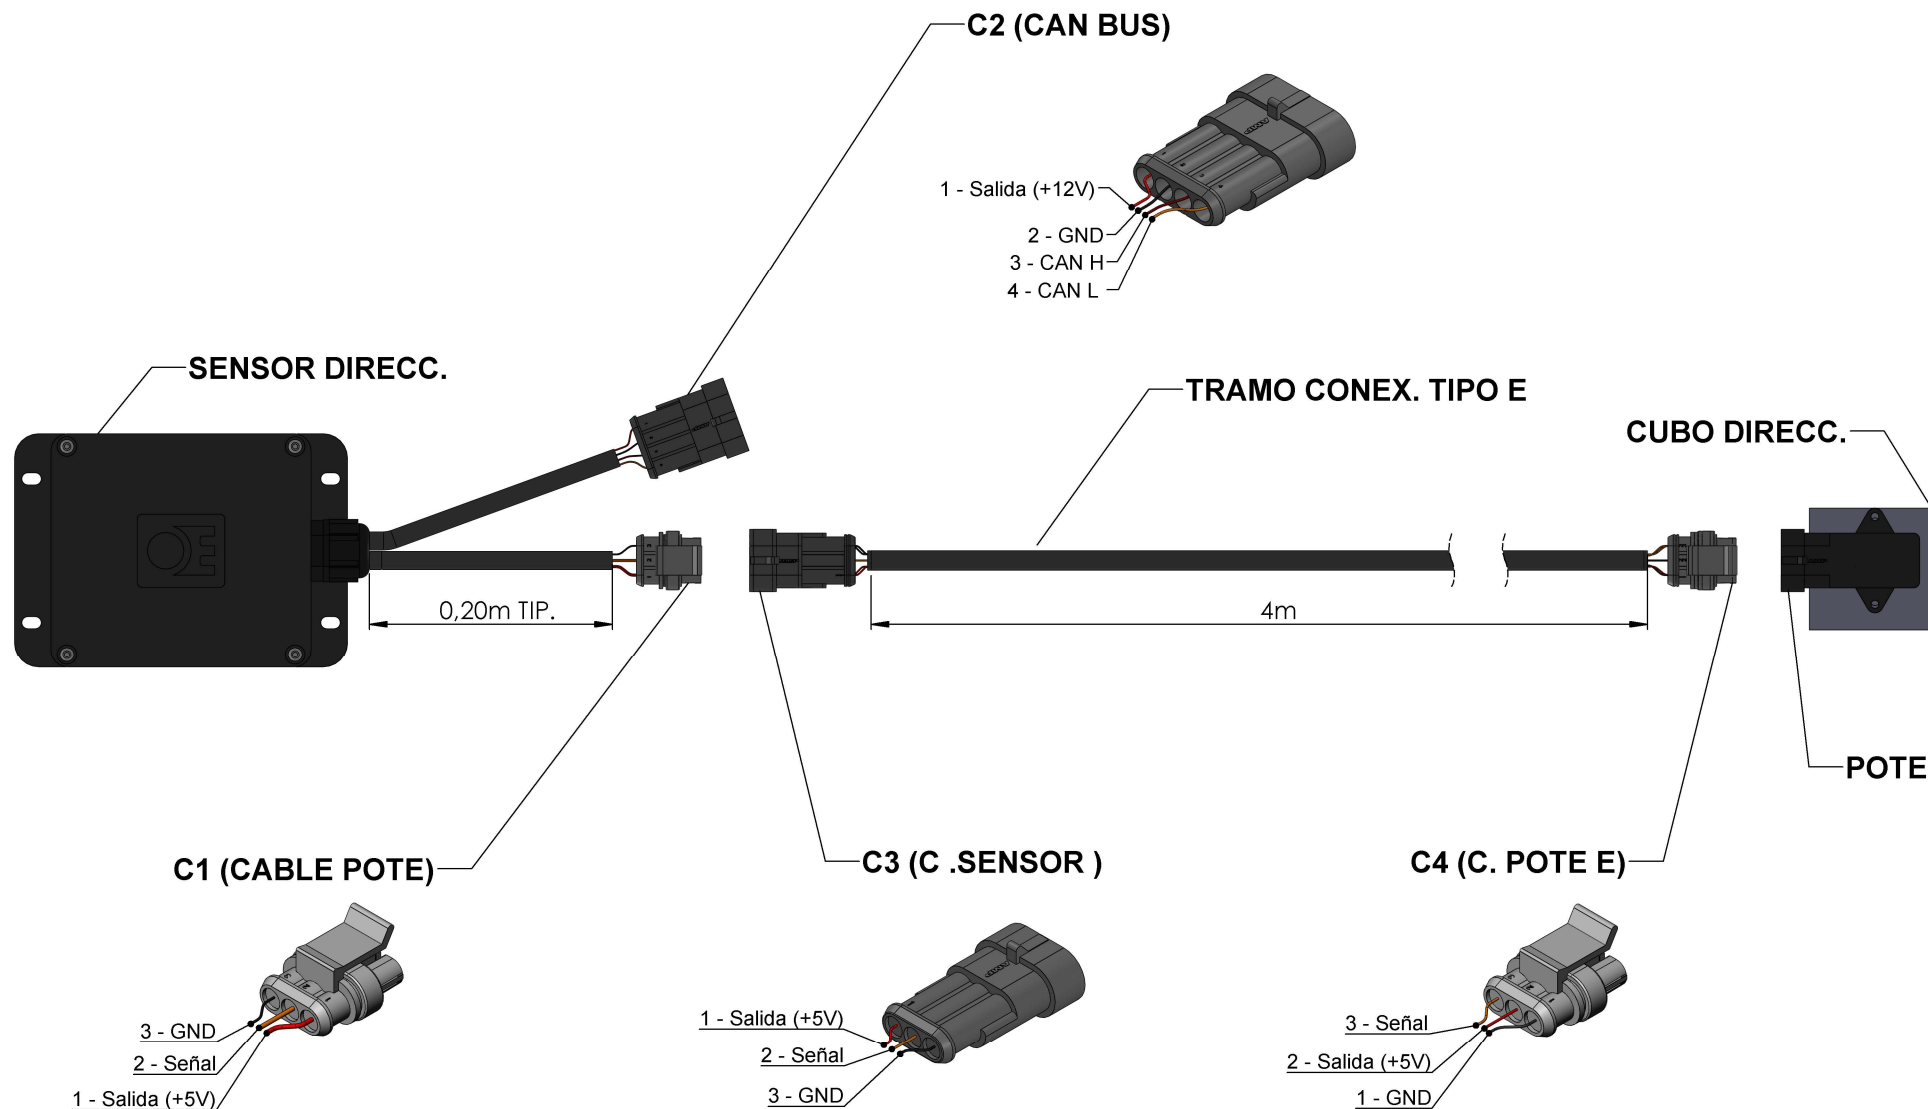


Conector C1 (S.S.3 - P.H)			
PIN	Funcion	Color	ϕ Cable(mm)
1	Salida (+5V)	rojo / red	0,5
2	Señal	naranja / orange	0,5
3	Act. Map.	azul / blue	0,5




Conector C2 (S.S.4 - P.M)			
PIN	Funcion	Color	ϕ Cable(mm)
1	Salida (+12V)	rojo / red	0,5
2	GND	negro / black	0,5
3	CAN H	marrón / brown	0,5
4	CAN L	naranja / orange	0,5



Conector C3 (S.S.3 - P.M)				
PIN	Funcion	Color	ϕ Cable(mm)	Conex. C4 (PIN)
1	Salida (+5V)	rojo / red	0,5	2
2	Señal	naranja / orange	0,5	3
3	GND	negro / black	0,5	1



Conector C4 (S.S.3 - P.H)				
PIN	Funcion	Color	ϕ Cable(mm)	Conex. C3 (PIN)
1	GND	negro / black	0,5	3
2	Salida (+5V)	rojo / red	0,5	1
3	Señal	naranja / orange	0,5	3



Lista de componentes			
Componentes	Función	Descripción	Cod. Fabricante
C1	CABLE POTE	Conector S.S.3 - P.H	282087-1
C2	CAN BUS	Conector S.S.4 - P.M	282106-1
C3	C. SENSOR	Conector S.S.3 - P.M	282105-1
C4	C. POTE E	Conector S.S.3 - P.H	282087-1

MICROELECT	Rev.: 0	Descripción: Sensor Direcc. (Conex. E)	Rev.		
	Esc.: -			Diagramación cableado	22/03/23
				Observaciones	Fecha